


Ultraleather — Ultrafabrics





291-5684 Arctic

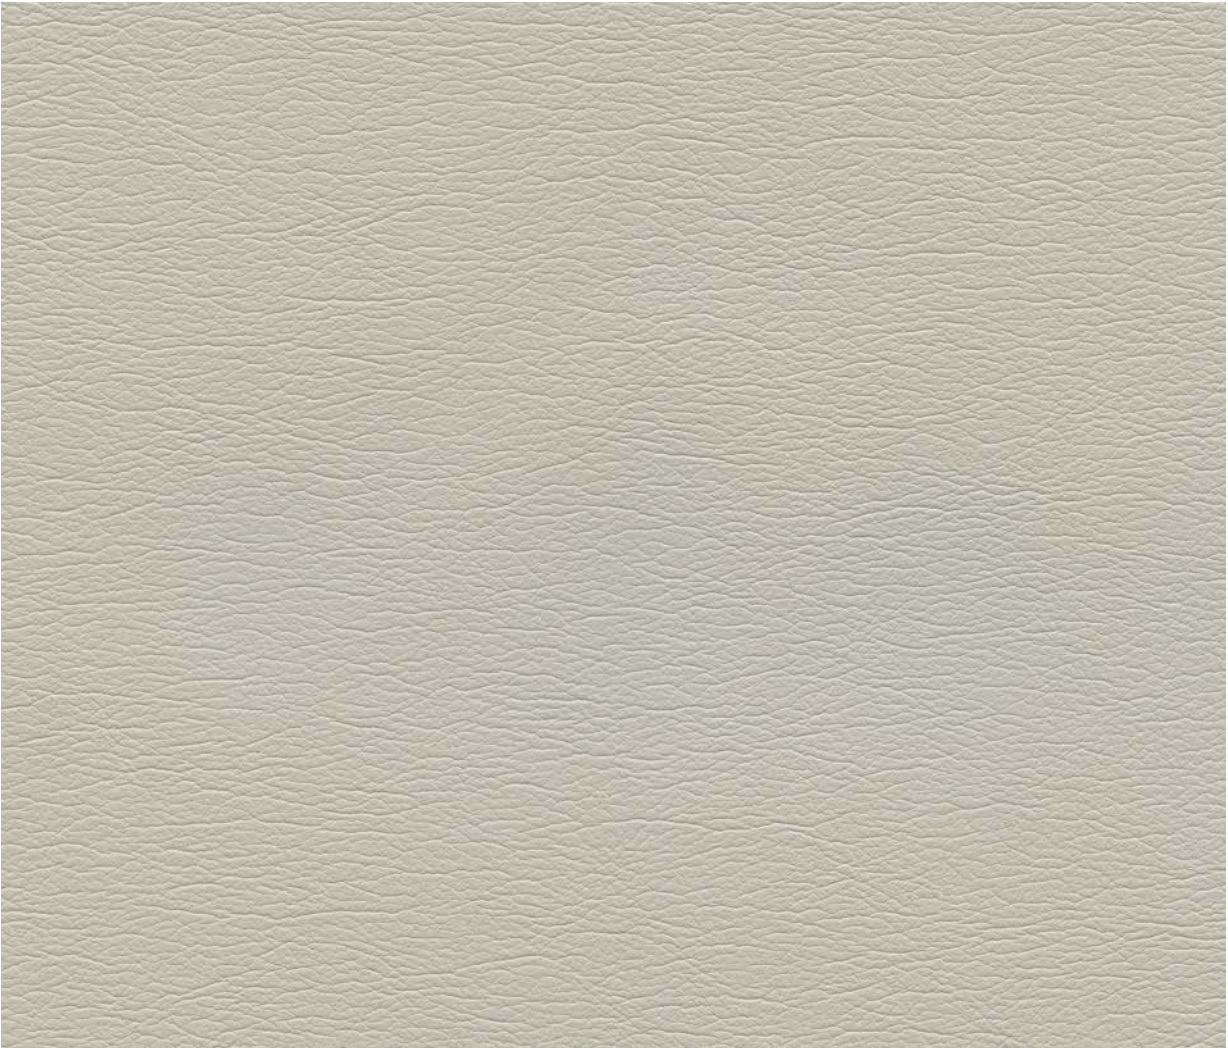

291-0001 White



291-5805 Ermine



291-5714 Ice



291-5668 Silver Pearl



291-5666 Dove Grey



291-5040 Elephant



291-5708 Granite



291-5763 Charcoal




291-5806 Schooner



291-5607 Raven Wing



291-3720 Light Oyster



291-3455 Milkweed



291-3599 Almond



291-3700 Ivory



291-5250 Sassy



291-3601 Doe



291-3609 Buff



291-3850 Sand



291-3719 Champagne



291-8243 Apricot



291-5676 Pelican



291-3926 Cashmere



291-3851 Chamois



291-3778 Pecan



291-8233 Autumn Leaf



291-3729 Tan



291-3183 Pine Cone



291-1256 Papyrus



291-3612 Curry



291-1347 Poppy



291-3602 Stone



291-3523 Cave



291-3779 Taupe



291-3610 Hide



291-1176 Red



291-3777 Walnut



291-3666 Fudge




291-3205 Hot Chocolate



291-3469 Garnet



291-1311 Brick



291-7214 Boysenberry



291-2553 Cyan



291-2527 Lagoon



291-4430 Eucalyptus



291-5200 Citrus



291-1312 Chianti



291-2552 Riviera



291-2507 St. John



291-4314 Herbal Mist



291-4460 Parrot



291-9385 Plum



291-2508 Rain Dance



291-2685 Bayou



291-4351 Shetland



291-4454 Sonora



291-2551 Baltic



291-2478 Diplomat Blue



291-2509 Poseidon



291-2555 Nile



291-2556 Admiral

Ultraleather from Ultrafabrics

Application

Interior Upholstery

General Specifications

Composition:

100% Polycarbonate Polyurethane Surface
100% Reinforced Rayon Backing
containing TENCEL™ Modal fibers

Weight:

Approx. 9.7 oz. Per Square Yard
Approx. 330 Grams Per Square Metre

Thickness:

Approx. 0.95 Millimetres

Width:

54 Inches / 137 Centimetres

Repeat:

None

Performance

Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)*
BS EN ISO 12947-2 / 180,000 Rubs (Martindale)*
*meets or exceeds

Hydrolysis:

14+ Weeks
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D751

Tensile Strength: BS EN ISO 1421

Colorfastness

Light: AATCC 16.3, 200 Hours, Grade 4
ISO 105 B02, Grade 6

Crocking: AATCC 8, Grade 4-5 Wet & Dry

Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117-2013 - Pass
- FMVSS 302 & 95/28 Annex IV - Pass
- NFPA 260 - Class 1
- UFAC - Class 1

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- IMO FTPC Part 8
- BS EN 1021 Parts 1 & 2
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.



TENCEL™ is a trademark of Lenzing AG

ultrafabricsinc.com

Ultrafabrics® and logo, and Ultraleather® are registered trademarks of Ultrafabrics Inc. Made in Japan.

